





- 後拉夾持，配合擋料塊機構，可精準定位工件入料長度，使長度精度控制更加精準。
- 擋料塊與防塵蓋可互換搭配使用，應用與防屑功能可以兼顧。
- End stop clamping.
- With backgauge block mechanism, positioning and the length control of the workpiece can be more precise.
- Backgauge block and cover are interchangeable. The chip-proof function can also be achieved.
- J 值為連結螺帽未車製螺牙時的孔徑。
K max 值為連結螺帽可車製螺牙之最大規格，可依實際需求訂製。
- J is the hole diameter of blank draw nut.
K is the maximum thread specification and it could be customize.

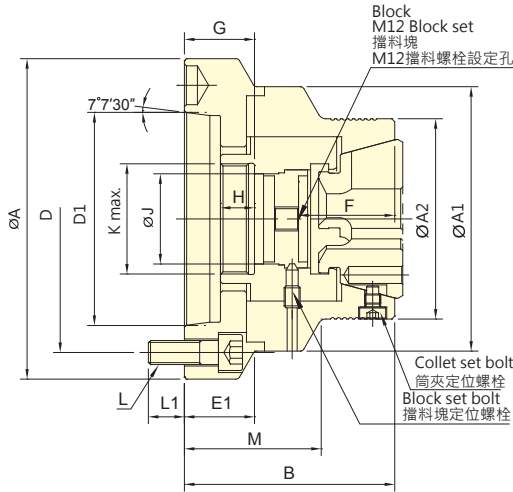

CBE-A

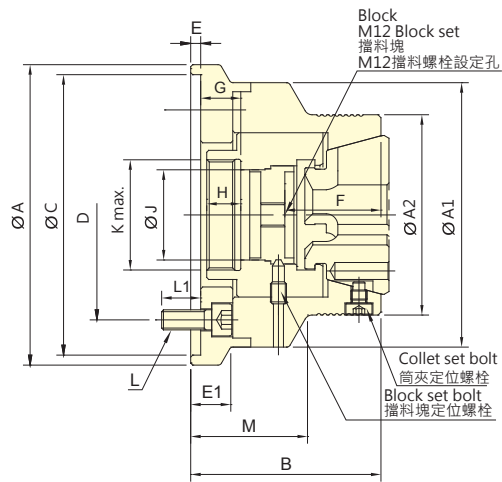

CBE

保留規格修改的權利
Subject to technical changes

技術規格 SPECIFICATIONS

型號 Model	套筒行程 Plunger stroke mm	最大夾持能力 Max. Chucking Capacity			容許油壓缸 推力 Max. D.B. pull kN (kgf)	最大夾持力 Max. clamping force kN (kgf)	最高迴轉數 Max. speed min ⁻¹ (r.p.m.)	重量 Weight (kg)	使用筒夾 Matching steel collet	適用迴轉缸 Matching Cyl.	最大使用壓力 Max. pressure MPa (kgf/cm ²)	
		圓棒 Round mm	六角材 Hexagom mm	方材 Square mm								
CBE-42	4.5	4~42	7~36	7~30	34.3(3500)	78.4(8000)	7000	6	RG-42	TK-B846	2.8(28)	
CBE-4212	4.5	4~42	7~36	7~30	34.3(3500)	78.4(8000)	7000	6	RG-42	TK-B846	2.8(28)	
CBE-42	A5	4.5	4~42	7~36	7~30	34.3(3500)	78.4(8000)	7000	6.3	RG-42	TK-B846	2.8(28)
CBE-42	A6	4.5	4~42	7~36	7~30	34.3(3500)	78.4(8000)	7000	7.4	RG-42	TK-B846	2.8(28)
CBE-52	4.5	4~52	7~36	7~30	39.2(4000)	92.1(9400)	7000	6.9	RG-52	TK-A853	3.2(32)	
CBE-5212	4.5	4~52	7~36	7~30	39.2(4000)	92.1(9400)	7000	6.7	RG-52	TK-A853	3.2(32)	
CBE-5217	4.5	4~52	7~36	7~30	39.2(4000)	92.1(9400)	7000	8.9	RG-52	TK-A853	3.2(32)	
CBE-52	A5	4.5	4~52	7~36	7~30	39.2(4000)	92.1(9400)	7000	7.8	RG-52	TK-A853	3.2(32)
CBE-52	A6	4.5	4~52	7~36	7~30	39.2(4000)	92.1(9400)	7000	8.3	RG-52	TK-A853	3.2(32)
CBE-65	4.5	4~65	8~56	8~46	44.1(4500)	103(10500)	6000	9.3	RG-65	TK-1068	3.0(30)	
CBE-6517	4.5	4~65	8~56	8~46	44.1(4500)	103(10500)	6000	8.6	RG-65	TK-1068	3.0(30)	
CBE-65	A5	4.5	4~65	8~56	8~46	44.1(4500)	103(10500)	6000	10.8	RG-65	TK-1068	3.0(30)
CBE-65	A6	4.5	4~65	8~56	8~46	44.1(4500)	103(10500)	6000	9.5	RG-65	TK-1068	3.0(30)
CBE-65	A8	4.5	4~65	8~56	8~46	44.1(4500)	103(10500)	6000	9.5	RG-65	TK-1068	3.0(30)

外型尺寸 DIMENSIONS

Model	A	A1	A2	B	C(H6)	D	D1	E	E1	F	G max.	G min.	H	J	K max.	L	L1	M	
CBE-42	150	132	100	95	140	104.8	-	5	20	48	27.5	23	17	45	M55x2	4~M10x25	19.5	58	
CBE-4212	132	132	100	95	120	100	-	5	-	48	27.5	23	17	45	M55x2	4~M10x25	19.5	58	
CBE-42	A5	132	132	100	105	-	104.8	82.56	-	48	37.5	33	17	45	M55x2	4~M10x30	16	68	
CBE-42	A6	160	132	100	105	-	133.4	106.38	-	35	48	37.5	33	17	45	M55x2	4~M12x35	18	68
CBE-52	150	140	107	99	140	104.8	-	5	-	52	22.5	18	17	56	M60x2	4~M10x20	14.5	60	
CBE-5212	140	140	107	99	120	100	-	5	-	52	22.5	18	17	56	M60x2	4~M10x20	14.5	60	
CBE-5217	180	140	107	109	170	133.4	-	6	-	52	31.5	27	17	56	M60x2	4~M12x30	18	70	
CBE-52	A5	140	140	107	109	-	104.8	82.56	-	52	37.5	33	17	56	M60x2	4~M10x30	16	70	
CBE-52	A6	160	140	107	109	-	133.4	106.37	-	52	37.5	33	17	56	M60x2	4~M12x35	18	70	
CBE-65	157	157	122	116	140	104.8	-	6	-	56	40.5	36	17.5	68	M75x2	4~M10x30	18	74	
CBE-6517	180	157	122	114	170	133.4	-	6	24	56	40.5	36	17.5	68	M75x2	4~M12x30	18	72	
CBE-65	A5	157	157	122	114	-	104.8	82.56	-	56	38.5	34	17.5	68	M75x2	4~M10x25	16	72	
CBE-65	A6	157	157	122	112	-	133.4	106.38	-	56	36.5	32	17.5	68	M75x2	4~M12x35	18.5	70	
CBE-65	A8	202	157	122	116	-	171.4	139.72	-	38	56	36.5	32	17.5	68	M75x2	4~M16x35	24	74