




- 迴轉工作台上夾治具空油壓缸用迴轉分流閥。
- 迴轉閥內部經特殊設計，使得迴轉軸可輕力轉動，且不虞漏油。
- I型為一迴路，同時控制開夾動作。
- II型為二迴路，可分別控制開夾動作。
- Rotary valve is used for clamping cylinder on rotary table.
- Through unique design, it can make the rotary housing be rotated light force and is free from oil leaking.
- I Type is a single circuit which controls the clamping.
- II Type is a double circuit which separately controls the clamping.
- RV 型式的洩油孔配管務必單獨接回油槽，以避免產品背壓。
- The drain port of RV type should be independently connected to oil tank to avoid back pressure.

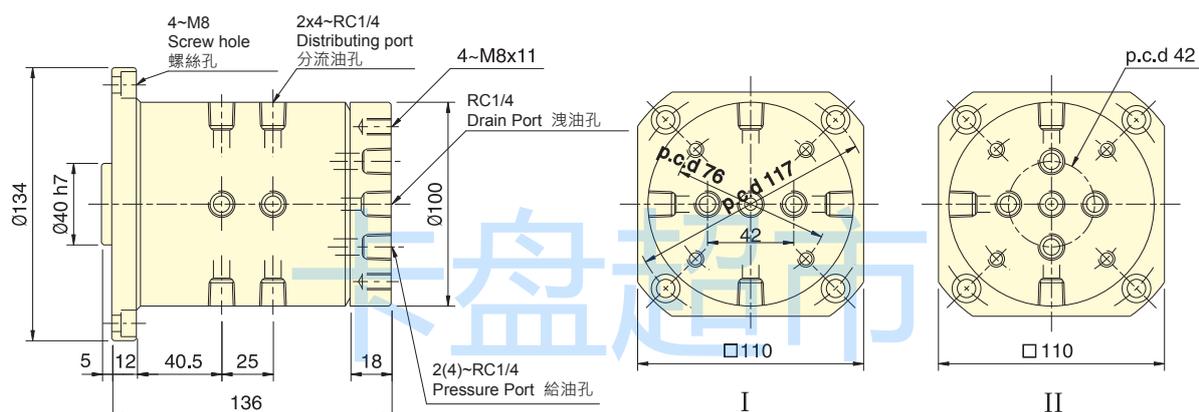


保留規格修改的權利
Subject to technical changes

技術規格 SPECIFICATIONS

型號	分流數	最高使用壓力	重量
Model	Distributing	Max. pressure	Weight
		MPa(kgf/cm ²)	kgs
RV-31H	4 向 (可訂製)	4.0(40)	7.4

註:RV 可提供客製。(Note:RV can be custom-made.)

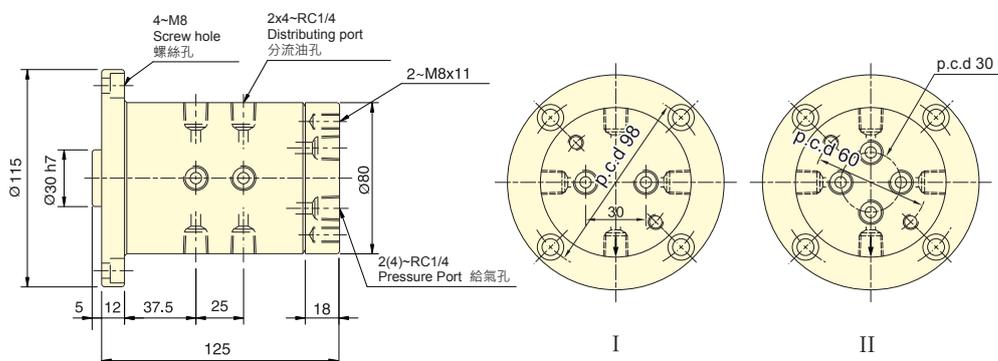

保留規格修改的權利
Subject to technical changes

技術規格 SPECIFICATIONS

型號	分流數	最高使用壓力	重量
Model	Distributing	Max. pressure	Weight
		MPa(kgf/cm ²)	kgs
RV-A31H	4 向 (可訂製)	0.8(8)	4.8

註:RV-A 可提供客製。(Note:RV-A can be custom-made.)