


CRA

筒夾夾頭

Collet chuck for short taper mount

- 筒夾夾頭可快速拆卸止檔蓋，適用於NC/CNC車床加工棒材。
- 棒材能經由夾頭通孔進行送料作業。
- 可依工作形狀及尺寸來選擇適合的筒夾。

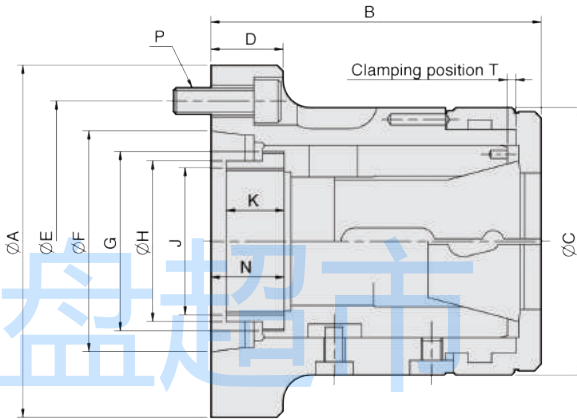


單位：mm

型式規格	適合主軸	容許棒材直徑 (mm)	套筒行程 (mm)	最大容許推力 kN(kgf)	最大夾持力 kN(kgf)	最高轉速 (r.p.m.)	重量 (kg)
CR26A4	A2-4	26	5	20(2039)	44(4486)	7000	4.5
CR30A4	A2-4	30	5	20(2039)	44(4486)	7000	4.1
CR42A5	A2-5	42	7	25(2549)	55(5608)	6000	6.2
CR42A6	A2-6	42	7	25(2549)	55(5608)	6000	8.2
CR52A6	A2-6	52	7	30(3059)	65(6628)	5000	12.2
CR60A6	A2-6	60	7	30(3059)	65(6628)	5000	21
CR80A8	A2-8	80	7	35(3568)	73(7443)	4000	21

型式尺寸	A	B	C	D	E	F	G	H	J max.	K	N	P	T
CR26A4	112	103.5	85	30	82.55	63.513	M50xP1.5	45	M40xP1.5	15	21.7	3-M10	2.3
CR30A4	112	103.5	85	30	82.55	63.513	M50xP1.5	45	M40xP1.5	15	21.7	3-M10	2.3
CR42A5	135	127	100	27	104.78	82.563	M66xP1.5	60	M55xP2.0	25	30.9	4-M10	3.1
CR42A6	170	127	100	32	133.35	106.375	M66xP1.5	66	M60xP2.0	22	30.9	4-M12	3.1
CR52A6	170	144	130	27	133.35	106.375	M90xP1.5	66.7	M60xP2.0	30	29.9	4-M12	3.1
CR60A6	170	145	130	27	133.35	106.375	M90xP1.5	80	M74xP2.0	30	29.9	4-M12	3.1
CR80A8	220	170	156	35	171.45	139.719	M114xP2.0	99	M90xP2.0	27.5	32.4	6-M16	6.1

夾持範圍 CHUCK	MULTIBORE		SPRING COLLET	
	NO.	Cat.No. / ○ / ○ / □	Cat.No.	/ ○ / ○ / □
CR26	M-667	/ 26 / 22 / 18	161E/8744	/ 26 / 22 / 18
CR30	M-669	/ 30 / 26 / 21	163E/4249	/ 30 / 26 / 21
CR42	M-673	/ 42 / 36 / 30	173E/4728	/ 42 / 36 / 30
CR52	-	/ - / - / -	177E	/ 52 / 45 / 36
CR60	M-677	/ 60 / 52 / 42	185E/4291	/ 60 / 52 / 42
CR80	J-660	/ 80 / 69 / 56	193E/H-47	/ 80 / 69 / 56

筒夾簡圖

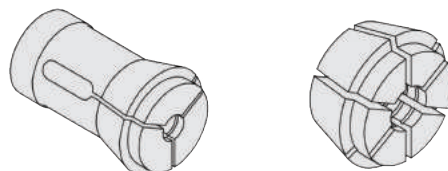

- Spring Collet -

- Multi-Bore Collet -

*使用筒夾須符合DIN6343規範